

Adjustable flow rate and stream patterns hand nozzles



The 1000 lpm adjustable flow rate and spray patterns hand nozzles offer the highest flow rate, precision and durability, that has been proved itself throughout the world.

The nozzles are available in two versions: "ECO" and "Premium".

The calibrated flow rates are easily selectable by means of an indexed ring. The tactile marker indicates the highest flow rate.

The indexed head ring with tactile markings allows the adjustment of the different stream patterns (straight spray, attack spray and wide angle spray).

This range of nozzles is available with three different head types : Debi (cut teeth), Magi (rubber molded teeth) and Turbo (spinning teeth).


Maximum working pressure: PN16
Shutoff: ball valve
Opening: by operating handle
Flush position: yes
Material: aluminium alloy
Surface treatment: hard anodisation
Body type : profile
Pistol grip : double

Options: low expansion foam attachment, medium expansion foam attachment.


Sheath colours:

**Compliant with the norm
EN 15182-2**

Fire Hunter Co
 Also known as Sayaad Alnaar Company
 29a street ,Naif road ,UAE
 Admin@firehunter.co
 00971543370006

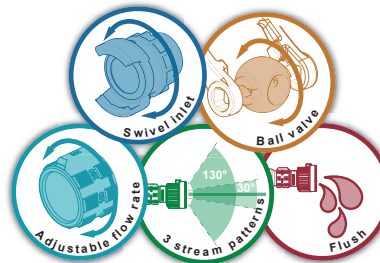


MAGIKADOR 1000 - Double pistol grip



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
2.5" female NST-NH	100-150-200-250 GPM	100 PSI			44296
DSP DN65	300 - 500 - 750 - 1000 lpm	6 bar	417 x 338 x 160	4.5	35582
Storz B/75	300 - 500 - 750 - 1000 lpm	6 bar	381 x 338 x 166	5.2	35582.B75
2.5" female NST-NH	95-125-150-200-250 GPM	100 PSI			44295
2.5" female NST-NH	125-150-200-250 GPM	100 PSI			44297

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments


DEBIKADOR 1000 - Double pistol grip



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN65	300 - 500 - 750 - 1000 lpm	6 bar	417 x 338 x 160	4.5	35585
Storz B/75	300 - 500 - 750 - 1000 lpm	6 bar	381 x 338 x 166	5.2	35585.B75
2.5" female NST-NH	95-125-150-200-250 GPM	100 PSI			44298
2.5" female NST-NH	100-150-200-250 GPM	100 PSI			44299
2.5" female NST-NH	125-150-200-250 GPM	100 PSI			44300

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments

TURBOKADOR 1000 - Double pistol grip



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN65	300 - 500 - 750 - 1000 lpm	6 bar	417 x 338 x 160	4.5	35588
Storz B/75	300 - 500 - 750 - 1000 lpm	6 bar	381 x 338 x 166	5.2	35588.B75
2.5" male Instantaneous	300-500-750-1000 lpm	6 bar			44301
2.5" male BSP	300-500-750-1000 lpm	6 bar			44302

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments