

Adjustable flow rate and stream patterns hand nozzles




The 1000 lpm adjustable flow rate and spray patterns hand nozzles, offering the highest flow rate, precision, and durability, have proved themselves throughout the world. The nozzles are available in two versions: "ECO" and "Premium". The calibrated flow rates are easily selectable by means of an indexed ring. The tactile marker indicates the highest flow rate. The indexed head ring with tactile markings allows the adjustment of the different stream patterns (straight spray, attack spray and wide angle spray). This range of nozzles is available with three different head types : Debi (cuth teeth), Magi (molded rubber teeth) and Turbo (spinning teeth).

Maximum working pressure: PN16
Shutoff: ball valve
Opening: by operating handle
Flush position: yes
Material: aluminium alloy
Surface treatment: hard anodisation
Body type: molded
Pistol grip : single


Options: low expansion foam attachment, medium expansion foam attachment.

Sheath colours:

**Compliant with the norm
EN 15182-2**

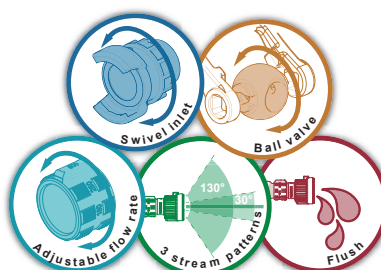


MAGIKADOR 1000 - ECO



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN65	300-500-750-1000 lpm	6 bar	422 x 126 x 260	4.1	44287
2.5" female NST-NH	95-125-150-200-250 GPM	100 PSI			44288
2.5" female NST-NH	100-150-200-250 GPM	100 PSI			44289
2.5" female NST-NH	125-150-200-250 GPM	100 PSI			44290
2.5" female NST-NH	200-250-300-350 GPM	100 PSI	450 x 126 x 260	4.8	28686

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments


DEBIKADOR 1000 - ECO



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN65	300-500-750-1000 lpm	6 bar	416 x 126 x 260	4.1	44291
2.5" female NST-NH	95-125-150-200-250 GPM	100 PSI			44292
2.5" female NST-NH	100-150-200-250 GPM	100 PSI			44293
2.5" female NST-NH	125-150-200-250 GPM	100 PSI			44294
2.5" female NST-NH	200-250-300-350 GPM	100 PSI	450 x 126 x 260	4.8	28687

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments

Turbokador 1000 - ECO



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN65	300 - 500 - 750 - 1000 lpm	6 bar	417 x 126 x 262	4.1	44351
2.5" female NST-NH	95-125-150-200-250 GPM	100 PSI			44352
2.5" female NST-NH	100-150-200-250 GPM	100 PSI			44353
2.5" female NST-NH	125-150-200-250 GPM	100 PSI			44354

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments