


## Adjustable flow rate and stream patterns hand nozzles



400 lpm adjustable flow rate and spray pattern hand nozzles compliant with DIN 14367. The calibrated flow rates are easily selectable by means of an indexed ring. The tactile marker indicates the highest flow rate. The indexed head ring with tactile markings allows the adjustment of the different stream patterns (straight spray, attack spray and wide angle spray). This range of nozzles is available with three different head types : Turbo (spinning teeth), Debi (cut teeth) and Magi (molded rubber teeth).

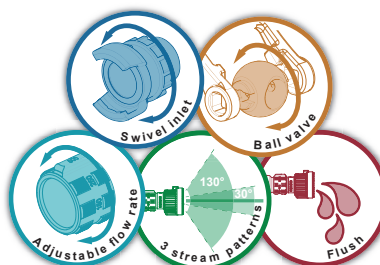

**Maximum working pressure:** PN16  
**Shutoff:** ball valve  
**Opening:** by operating handle  
**Flush position:** yes  
**Material:** aluminium alloy  
**Surface treatment:** hard anodisation  
**Body type :** profile  
**Pistol grip :** single

**Options:** low expansion foam attachment, medium expansion foam attachment.


**Sheath colours:**

**Compliant with the norm  
DIN 14 367**



TÜV certificate  
Number PVR 2/02


### MAGIKADOR 400



| Inlet                | Flow rate          | Working pressure | Dimensions (mm) | Weight (kg) | Ref.             |
|----------------------|--------------------|------------------|-----------------|-------------|------------------|
| Storz 38             | 60-130-250-400 lpm | 6 bar            | 351 x 126 x 267 | 2.9         | <b>16048.38</b>  |
| ISO M45 x 150 female | 60-130-250-400 lpm | 6 bar            |                 |             | <b>16048.400</b> |

Compatible with the low expansion ref. 09297 and medium expansion ref. 09713 foam attachments


### DEBIKADOR 400



| Inlet      | Flow rate          | Working pressure | Dimensions (mm) | Weight (kg) | Ref.         |
|------------|--------------------|------------------|-----------------|-------------|--------------|
| Storz C/52 | 60-130-250-400 lpm | 6 bar            | 351 x 126 x 267 | 2.9         | <b>13641</b> |

Compatible with the low expansion ref. 09297 medium expansion ref. 09713 foam attachments.

### TURBOKADOR 400



| Inlet      | Flow rate          | Working pressure | Dimensions (mm) | Weight (kg) | Ref.         |
|------------|--------------------|------------------|-----------------|-------------|--------------|
| Storz C/52 | 60-130-250-400 lpm | 6 bar            | 351 x 126 x 267 | 2.9         | <b>13134</b> |

Compatible with the low expansion ref. 09297 medium expansion ref. 09713 foam attachments.