

Adjustable flow rate and stream patterns hand nozzles



The 750 lpm adjustable flow rate and stream patterns hand nozzles represent the ideal compromise between the 500 lpm and 1000 lpm versions. They offer power, lightness and manoeuvrability.

The nozzles are available in two versions: "ECO" and "Premium".

The calibrated flow rates are easily selectable by means of an indexed ring. The tactile marker indicates the highest flow rate.

The head ring with tactile markings allows different spray pattern selection (straight spray, flash over and wide angle spray).


This range of nozzles comes with three different head types: Debi (cut teeth), Magi (rubber moulded teeth) and Turbo (spinning teeth).

Maximum working pressure: PN16
Shutoff: ball valve
Opening: by operating handle
Flush position: yes
Material: aluminium alloy
Surface treatment: hard anodisation
Body type : profile
Pistol grip : single


Options: low expansion foam attachment, medium expansion foam attachment.

Sheath colours: 

**Compliant with the norm
EN 15182-2**

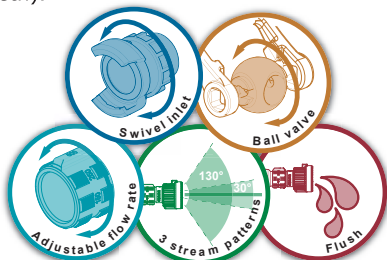


MAGIKADOR 750



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN40	265-380-500-600 lpm	7 bar	327 x 126 x 272	3.4	39264
DSP DN65	350-500-600-750 lpm	6 bar	402 x 126 x 272	4.1	37148
2.5" female NST-NH	95-125-150-200 GPM	100 PSI			44279
DSP DN65	250-500-750 lpm	6 bar			44280
2.5" female NST-NH	125-180 GPM	100 PSI			44281

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments


DEBIKADOR 750



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN65	350-500-600-750 lpm	6 bar	397 x 127 x 272	4.1	37142
2.5" female NST-NH	95-125-150-200 GPM	100 PSI			44282
2.5" female NST-NH	125-180 GPM	100 PSI			44283

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments

TURBOKADOR 750



Inlet	Flow rate	Working pressure	Dimensions (mm)	Weight (kg)	Ref.
DSP DN40	350-500-600-750 lpm	6 bar			44284
DSP DN65	350-500-600-750 lpm	6 bar	397 x 127 x 272	4.1	37154
Storz C/52	350-500-600-750 lpm	6 bar			44285
2.5" male Instantaneous	350-500-600-750 lpm	6 bar			44286

Compatible with the low expansion ref. 27487 and medium expansion ref. 44308 foam attachments