




## Poket - portable DN65 monitor , with shutoff



**Recommended outlet equipment**  
**Ø 2.5"**  
**Flow rate 1600 lpm**

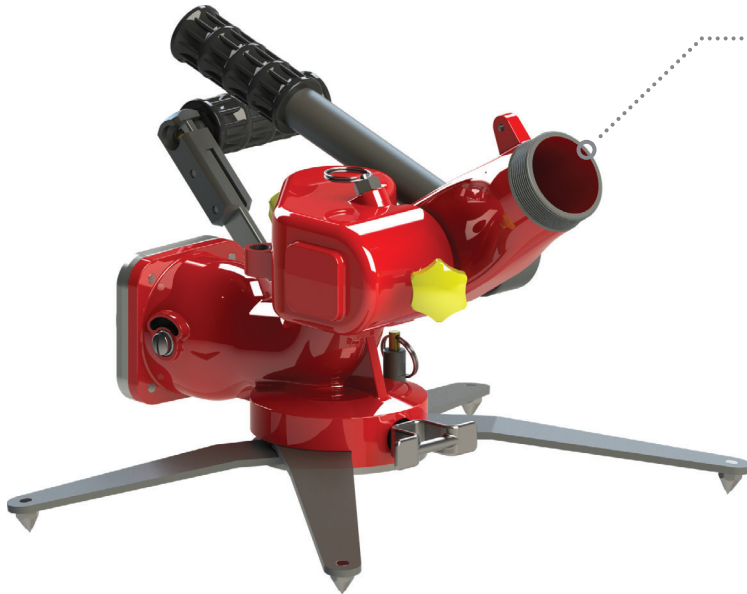




Ball valve shutoff, foldable operating handle



Safety pin and vertical position locking knob

**Maximum working pressure:** PN16  
**Material:** aluminium alloy  
**Surface treatment:** polyester coating  
**Shutoff:** with ball valve  
**Opening:** by lever  
**Horizontal movement:** 360°  
**Horizontal adjustment:** by handle  
**Vertical movement:** from +30° to +80°  
**Vertical adjustment:** by handle  
**Safety:** vertical adjustment lockable at +30° by pin, vertical and horizontal position locking knobs, locking pin for stabilising legs, anchoring strap, shutoff  
**Carrying handle:** yes  
**Foldable legs:** yes

**Options:** outlet equipments, couplings, storage bracket

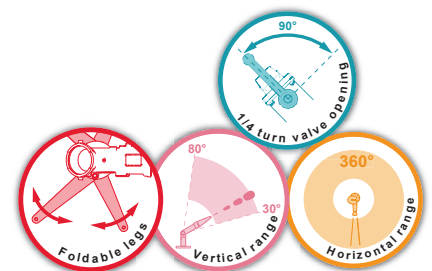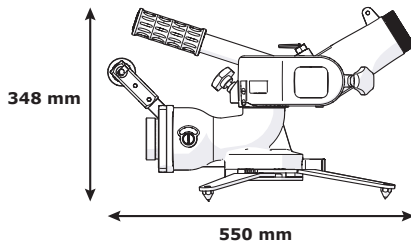

Our portable monitor "Poket Monitor" is made of anodised aluminium alloy with red polyester coating. The ball valve shutoff allows the user to open or close the monitors water flow during operation.

Flow rate can go up to 1600 lpm at 7 bar at the monitor's outlet.

The 360° horizontal movement and 80° vertical movement is adjustable through means of an operating handle, and locking done by knob.

An innate security system limits to 30° the elevation range of the diffuser (unlocked by manual action).

Our "Poket Monitor" monitor is equipped with four foldable legs with locking device, a multi-use ring allowing transport, a latch for a strap, as well as storing.

The pressure is monitored by a pressure gauge.

It can be equipped with different outlet equipments or couplings.



| Inlet         | Outlet        | Waterway Ø (mm) | Dimensions while folded (mm) | Weight (kg) | Ref.  |
|---------------|---------------|-----------------|------------------------------|-------------|-------|
| 2.5" male BSP | 2.5" male BSP | 65              | 558 x 205 x 284              | 11          | 31485 |