

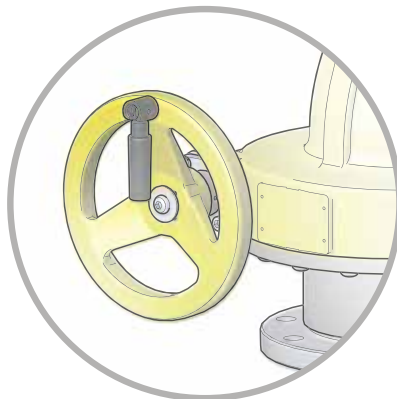
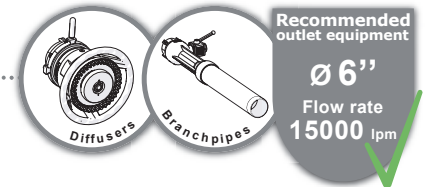


Dicodoplus - DN150 fixed monitor

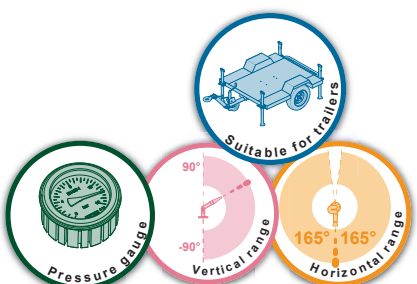

Handwheels for vertical and horizontal position adjustment with foldable handles

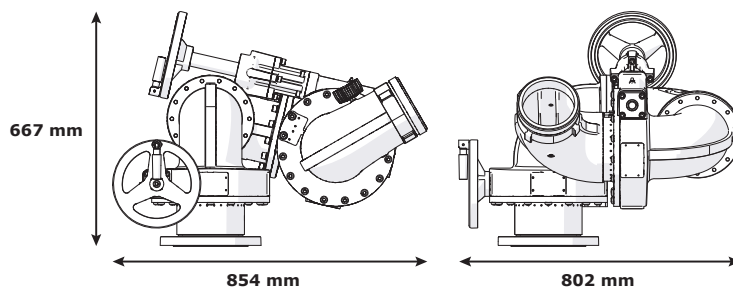

Our monitor "Dicodoplus DN150" offers a flow rate up to 15000 lpm at a working pressure of 7 bar at the monitors outlet.

It is made of aluminium alloy anodised with yellow polyester coating, and a PN16 design. The horizontal adjustment range is of 330° and the elevation ranges from -90° to +90°. Adjustable mechanical vertical and horizontal stops are available. The pressure is controlled by a pressure gauge. It can be equipped with different outlet equipments or inlet flanges.

Inlets	Outlet	Waterway Ø (mm)	Dimensions (mm)	Weight (kg)	Ref.
Flange DN150 PN16	6" male NST-NH	150	854 x 802 x 667	110	27763