




Aluminium alloy manual monitors

Fire Hunter Co
Also known as Sayaan Alnaar Company
29a street, Naif road, UAE
Admin@firehunter.co
00971543370006

Fixed monitor 4"

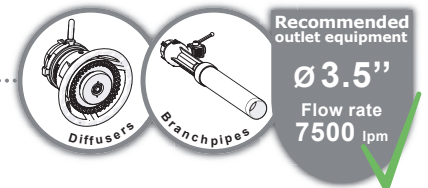

Recommended outlet equipment


Ø 3.5"

Flow rate
7500 lpm





Maximum working pressure: PN16
Material: aluminium alloy
Surface treatment: polyester coating
Horizontal movement: 360°
Horizontal adjustment: by handwheel
Vertical movement: from -90° to +90°
Vertical adjustment: by handwheel

Options: inlet flange, outlet equipments

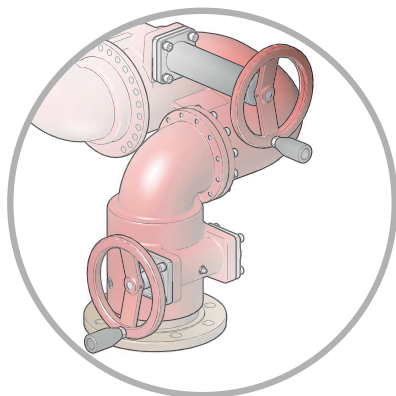

Handwheels for vertical and horizontal position adjustment

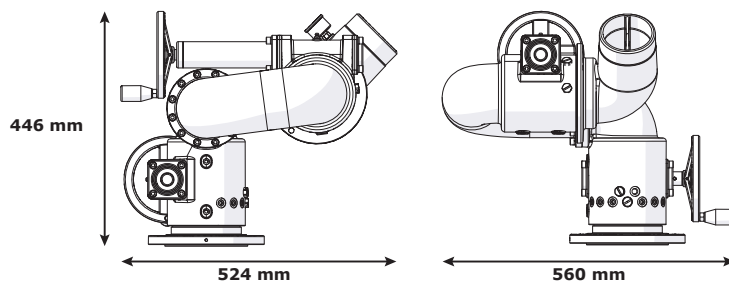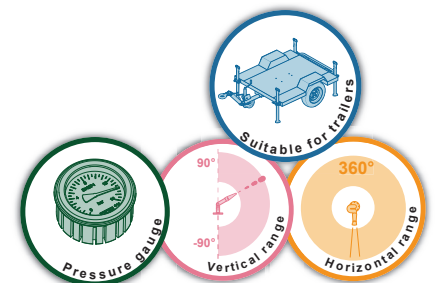

Our PN16 DN100 portable monitor is made of anodised aluminium alloy with red polyester coating.
Flow rate can go up to 7500 lpm at a working pressure of 7 bar at the monitors outlet.
It has the same features as the portable version : horizontal adjustment range of 360° and vertical from -90° to +90°, adjustable by handwheels.
It can be equipped with different outlet equipments or inlet flanges.

Inlets	Outlet	Waterway Ø (mm)	Dimensions (mm)	Weight (kg)	Ref.
Flange 4" ASA150	3.5" male NST-NH	100	524 x 560 x 446	34	29428

