




Aluminium alloy manual monitors

Fire Hunter Co
Also known as Sayaad Alnaar Company
29a street ,Naif road ,UAE
Admin@firehunter.co
00971543370006




Froggy tactical - portable monitor



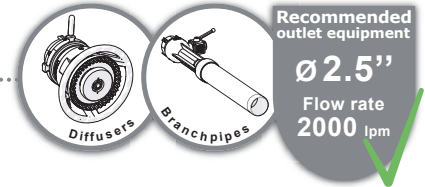


Maximum working pressure: PN16
Material: aluminium alloy
Surface treatment: polyester coating
Shutoff: with ball valve
Opening: by lever
Horizontal movement: from -26° to +26°
Horizontal adjustment: by valve
Vertical movement: from +26° to +84°
Vertical adjustment: by ball joint
Safety: locking of the legs, anchoring strap, shutoff
Carrying handle: yes
Foldable legs: yes

Options: outlet equipments, couplings, storage bracket

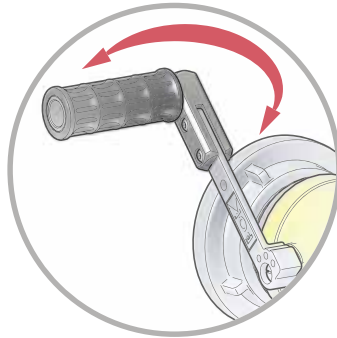

Ball valve shutoff, foldable operating handle

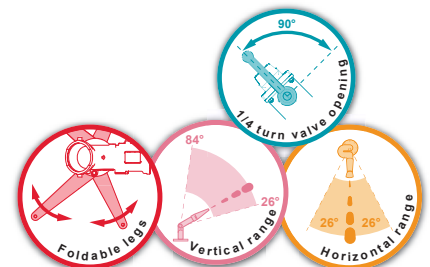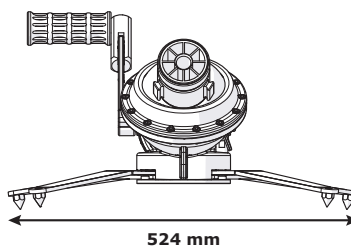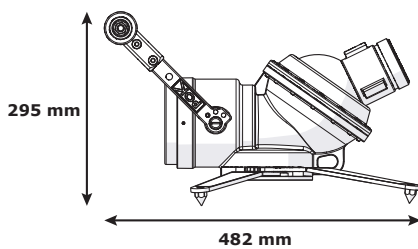

Our "Froggy tactical" monitor is a compact monitor with a flow rate up to 2000 lpm at 7 bar at the monitors outlet.
Its design is simple, compact and sturdy.
The carrying handle is also used as a shutoff valve.
The vertical position can be set from +26° to 84°, and the horizontal range between -26° to +26°.
It is equipped with four foldable stabilising legs and an anchorage ring to fix a strap.
It can be equipped with different outlet equipments or couplings.

Inlet	Outlet	Waterway Ø (mm)	Dimensions while folded (mm)	Weight (kg)	Ref.
4" male BSP	2.5" male BSP	65	554 x 211 x 306	11	29601.BSP

Storage bracket for portable monitor



Designation	Dimensions (mm)	Weight (kg)	Ref.
Storage bracket	490 x 250 x 50	3.2	20803M